


PE TOWING HEAD

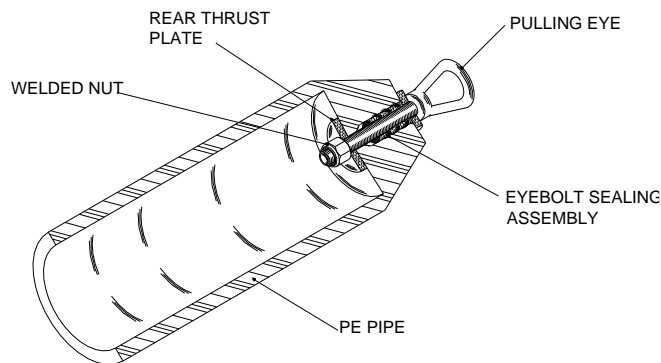

An all new product which has been developed to provide a strong fully sealed reusable Towing Head for the larger sizes of PE pipe.

This fully field tested product consists of a PE nose section, manufactured from a solid billet of PE, into which is fitted an eyebolt manufactured from high tensile steel. This eyebolt is in turn housed within a sealed sleeve which is free to rotate within the PE nose.

Thrust Washers are fitted to both the front and the rear of the eyebolt to provide additional strength, and to allow the Towing Head to be 'pushed back' during a directional drilling operation.

A 500mm length of PE pipe is factory fused onto the PE nose cone thereby allowing the Towing Head to be easily butt fused onto a pipe section or string.

After use it can simply be cut from this pipe string and butt fused onto the next one.

Designed for use in directional drilling applications or any other application where it is essential to maintain a clean pipe bore.

Can be fused onto any pipe wall thickness.

Available for all PE sizes from 200mm upwards.

MAJOR FEATURES

- Fully reusable
- Simple construction
- Fully sealed
- Large size range
- Cost effective
- Suitable for any pipe SDR.
- Quality Manufactured

USES

- Directional Drilling
- Slip Lining
- Direct Burial
- Pipe Movements

The company follow a policy of continuous product development and as such reserves the right to make alterations to equipment and techniques without prior notice.

PIPE EQUIPMENT SPECIALISTS LTD

66 DUKESWAY, TEESIDE INDUSTRIAL ESTATE, THORNABY, STOCKTON-ON-TEES, TS17 9LT, ENGLAND

TEL: +44 (0) 1642 769789 FAX: +44 (0) 1642 769456

www.pipe-equipment.co.uk Email: info@pipe-equipment.co.uk



ISO 9001, 14001, 45001